

## Lighting

### CBA - COMMERCIAL BASKET A Surface Direct/Indirect Luminaire

#### FEATURES

Ideal for corridors and office interiors with low ceilings.


Single, basket shaped perforated metal shield with integrated crossblade baffle.

Hinges either side. Die formed steel pin hinges.

Surface, stem, or chain mountable.

Advanced high-efficiency T5 technology.

Available with 1 or 2 lamps.

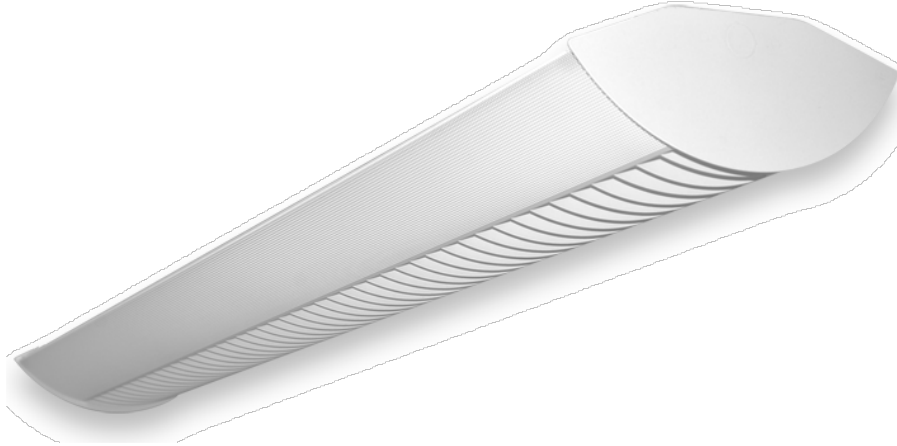

#### APPLICATIONS

Office Areas  
Corridors

#### APPLICATION FEATURES

Mid-level, designer, surface mounted, high visual comfort direct/indirect fluorescent luminaire. Comes with single basket shaped perforated metal shield with integrated metal crossblade baffle. For use in indoor applications where low glare, high quality and ease of installation are required. Uses high-efficiency fluorescent T5 technology. Available in 2, 4 and 8 foot lengths. Suitable for surface or suspended mounting.

- Dimming ballasts.

•

#### CONSTRUCTION

Die and brake formed, code gauge cold rolled steel housing assembly. Die formed, perforated cold rolled steel shielding. Metal shielding flexes over mounting studs on housing, for easy installation and re-lamping. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment.

#### MOUNTING

Offset mounting pads which keeps luminaire level and slightly off of mounting surface, are formed within the housing. Knock-outs are provided for stem mounting. Mounting holes are provided. Optional aircraft cable assemblies and canopy sets are available. Optional V (Speedy) hangers accommodate chain (not provided).

#### FINISH

Powder painted matte white visible surfaces.

#### OPTICS

Shields are perforated for direct illumination and contain a translucent opal white acrylic overlay diffuser for visual comfort. Integrated metal crossblade baffle with white overlay provides low glare while increasing the direct illumination and overall efficiency.

#### ELECTRICAL

All electrical components are UL listed or CSA approved Lamp holders provided ensure positive lamp retention. Electronic ballast is standard. See product selection for optional ballasts. Sufficient knockouts are provided on the back and ends for connections and through wiring.

#### APPROVALS

Approved to CSA and UL standards. (UL, or equivalent, marked only when specified.)


#### OPTIONS

- Emergency lighting power pack.
- Lamps included but not installed.
- Speedy hangers.
- Aircraft cable and canopy sets.
- Polycarbonate rotary lock lampholders.
- Suspension set for chain mounting.

#### OPTIONAL ADDERS

## Lighting

### Product Dimensions

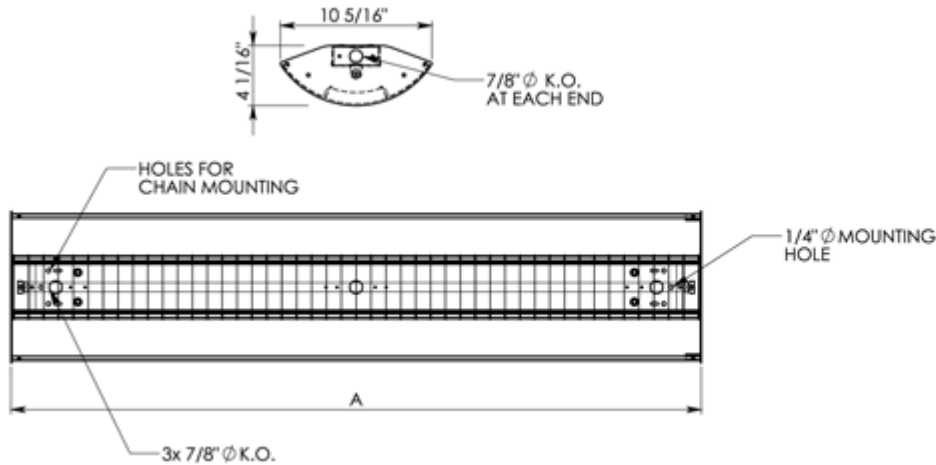

### Product Key

CBA  
2009-06-12

CBA	2	48	-	T8	32	P	120	-	Options
-----	---	----	---	----	----	---	-----	---	---------

**No. of lamps in Cross Section**  
1  
2

**Nom. Length (in.)**  
22  
24  
34  
36  
46  
48

**Lamp Watts**  
See Table below

**Lamp Type**  
T5  
T5HO  
T8  
T8HO  
T8VHO

**Voltage**  
120 - 120V  
240 - 240V  
277 - 277V  
347 - 347V  
UNV - 120-277V  
UN2 - 277-347V  
UN4 - 347-480V

**Ballast Type**  
N - Instant Start  
P - Prog. Start  
R - Rapid Start

**Ballast Options**

- B01 Ballast Disconnect - In-line Power Disconnect (CSA-UL Req'd For Voltages above 150v)
- B02 Dimming Addressable Digital (dali)
- B03 Dimming Low Voltage
- B04 Dimming Line Voltage
- B08 Ballast - High Ballast Factor
- B09 Ballast - Low Ballast Factor
- B30 Emergency USA Lighting Battery Pack 1-lamp 3000 Lumen
- B31 Emergency CDN Lighting Battery Pack 1-lamp
- B32 Emergency CDN Lighting Battery Pack 2-lamp
- B33 Emergency USA Lighting Battery Pack 1-lamp
- B34 Emergency USA Lighting Battery Pack 2-lamp

**Packaging Options (select one only)**

- K0 Pack Bulk

**Mounting Options (select one only)**

- M01 Aircraft Cable & Canopy Set (72-in length)
- M23 Mounting Speedy Hanger
- M26(xx) Mounting Stem and Canopy 3/8-in IP (5/8-in OD) (specify length (xx) 6-in increments)
- M30 Mounting Suspension Set (speedy hangers with 48-in chains)

**Approval and Rating Options**

- X6 USA Market
- X7 CSA and USA Market

### Lamp Watts

Length	Nominal Lamp Watts				
	T5	T5HO	T8	T8HO	T8VHO
24	14	24	17	-	-
36	21	39	25	-	-
48	28	54	32	44	84