


TDEW - Troffer Dish High-Efficiency Basket

Premium-Grade Recessed High-Efficiency Centre Basket T-Bar Luminaire


Product Details

Dimensions

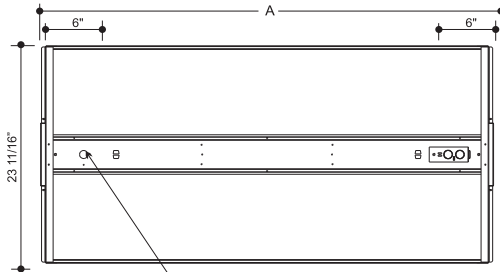


MODEL	NOMINAL LENGTH	A	B
1x4	48"	47 3/4"	11 11/16"
2x2	24"	23 3/4"	23 3/16"
2x4	48"	47 3/4"	23 3/16"

Back View 7/8"K.O.

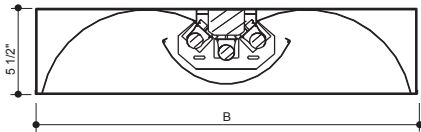

STATIC Cross Section

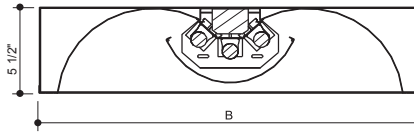

AIR SUPPLY/RETURN

Ordering



Size (Width x Length)

1x4	2L
2x2	3L
2x4	

No. of Lamps

1L
2L
3L

Lamp Watts
See table below

Lamp Type

T5
T5HO
T8
PLL

Voltage

120 - 120V
347 - 347V
UNV - 120 - 277V
UN4 - 347 - 480V

Ballast Type

N - Instant Start
P - Prog. Start
R - Rapid Start

Ballast Options

(See Option Code Section For More Information)

- B01 Ballast Disconnect - In-line Power Disconnect (CSA-UL Req'd For Voltages above 150v)
- B02 Dimming Addressable Digital (dali)
- B03 Dimming Low Voltage
- B04 Dimming Line Voltage
- B08 Ballast - High Ballast Factor
- B09 Ballast - Low Ballast Factor
- B30 Emergency Lighting Battery Pack Specification Grade
- B33 Emergency Lighting Battery Pack 1-lamp
- B34 Emergency Lighting Battery Pack 2-lamp

Packaging Options

- K0 Bulk Pack

Fusing and Breaker Options (select one only)

- T5 Fuseholder, In-line Double Pole
- T6 Fuseholder, In-line Single Pole

Wiring Options

- V09 Flexible Whip (standard 6' X 3-18 Ga.)
- V19 Modular Wiring System. (consult factory)
- V25 Radio Frequency Filter

Approval and Rating Options

- X6 USA Market
- X7 CSA and USA Market

X = Standard Option
Other options may be available.

Example:

TDEW2x42L-T5HO54PUNV-B01

Lamp Watts

Size	Nom. Lamp Watts			
	T5	T5HO	T8	PLL/Biax
1x4	28	54	32	-
2x2	14	24	17	40, 50, 55
2x4	28	54	32	-

Certain configurations may not be available.
Consult the factory for more information.

Note: For recessed drywall applications,
use either a 2x2 or 2x4 flange kit (p.237).

Note: For recessed drywall applications
use either a 1x4, 2x2 or 2x4 flange kit