



GLHB LED HIGH BAY

Description

The GLHB is the lighting solution for a wide variety of applications and mounting heights. Precision-designed optics, multiple distributions, and a choice of lumen outputs and color temperatures make the energy-efficient GLHB the ideal solution for industrial, commercial and other high bay applications.

Specification

Item No.	Input Power	Luminous	Efficacy	Input Voltage	Dimming Style
GLHB-2FT/4L/110/DM/FL	110	13750	125	120-277	0-10V
GLHB-2FT/6L/160/DM/FL	160	19280	120	120-277	0-10V
GLHB-4FT/4L/220/DM/FL	220	26730	121	120-277	0-10V
GLHB-4FT/6L/320/DM/FL	320	39360	123	120-277	0-10V

PERFORMANCE SUMMARY

Efficacy:>110LPW

Chip: LGIT 5630HE

CRI: Ra>80

CCT Options: 4000K 5000K 5700K

Driver: Espen Dimmable LED power supplies, Current can be adjusted

THD: <20%

PF: >0.9

The external driver ensures steady performance and long lifetime

Driver efficiency>85%.

Temperature Limited: The product has applied for a Type TL LED driver

Standard Lifetime: Designed minimum 50,000

Mounting: Surface Mounting

Standard Warranty: 5 Years

The Dimming type is continuous, The product can dim to 10%

Suitable for Damp Location

Order Information

Example: GLHB -2FT/4L/YYY/DM/OP XXXXX

GLHB	2FT	4L	110	DM	FL	5000K
Series	Size	Led Bar	Wattage	Dimmable	Option	CCT
LED High Bay	2FT-25.5"	4L=4*3500LM	110W	0-10V	Clear Lens	4000K
		6L=6*3500LM			Frost Lens	5000K
	4FT-45.9"	4L=8*3500LM	5700K			
	6L=12*3500LM					



Dimension

Item NO:	Length	Width	Depth
GLHB-2FT/4L	23.8"	12.6"	3.62"
GLHB-2FT/6L	23.8"	17.3"	3.62"
GLHB-4FT/4L	45.9"	12.6"	3.62"
GLHB-4FT/6L	45.9"	17.3"	3.62"


Mounting Option

V-Clips for dual point chain or cable hanging (Standard)



V-Clips

Pendant hanger

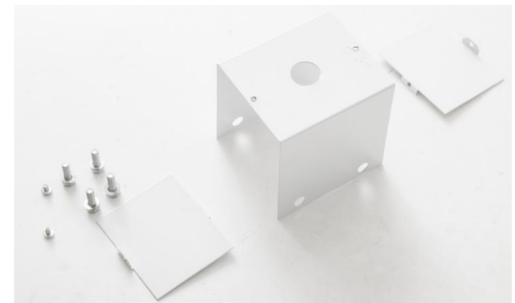

Wiring Diagram

