

DR w/ LED Tubes

DR SERIES

ARCHITECTURAL
STYLING
DURADO
DIRECT/INDIRECT
SUSPENDED

Available with LED Tubes
Available with LED Express



Job Name	
Catalog Number	
Notes	Type



application

- Attractive and versatile T5 or T8 direct/indirect luminaire offers a broad range of lamp configurations, and may accommodate up to (4) T5 or (4) T8 lamps to provide maximum uplite with diffused downlight for a balanced appearance
- Suspended mount as individual units or continuous rows

finish

- Prior to painting, all metal parts are treated with a multi-stage phosphate bonding process to ensure adhesion and inhibit rusting
- All exterior parts are finished with white powder coat for durability and a clean finished appearance

construction

- The DR series is a premium grade fluorescent luminaire specifically designed for long-term, dependable service
- Features durable cold rolled steel body, semi-perforated diffuser, quality paint finish and superior electrical components
- Electrical compartment constructed from code gauge steel for premium strength and rigidity
- Utilizing interlocking ends, continuous runs of any length may be constructed
- Available with LED modular light engines
- 50" Adjustable aircraft cable kit included
- Individual units are available up to 8' in length
- All fixtures are U.L. listed and IBEW union made

electrical

- All electrical components are U.L. listed or recognized
- Electronic Class P ballasts standard in fluorescent models

baffle

- Lateral light distribution through side perforations for soft downlight

end caps


- Flat style end caps

DR w/ LED Tubes

ordering guide

Note: Tandem units contain double the amount of lamps shown

D R
SERIES
ARCHITECTURAL
PENDANT MOUNT
INDIRECT / DIRECT

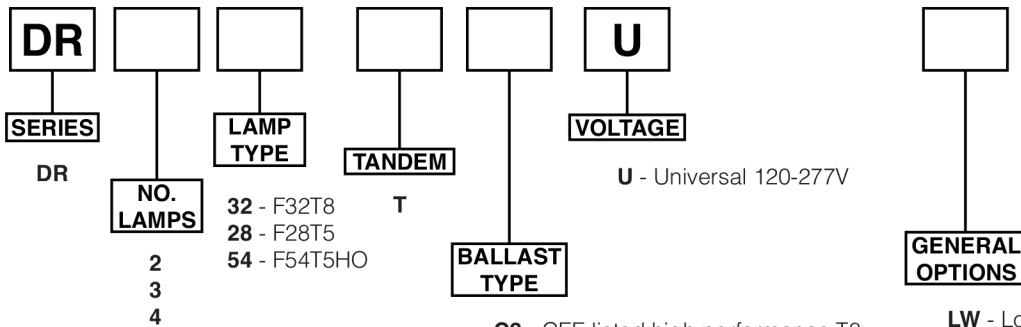

C8 - CEE listed high performance T8 (instant start)

CP8 - CEE listed high performance T8 (program start)

E5 - Electronic T5

H5 - Electronic T5HO

E8 - Electronic T8

PS8 - Program start T8

H8 - High lumen output T8

ED - Electronic dimming (consult factory)

LW - Low watt ballast (T8 only)




EM - Emergency pack, 1 lamp 90 min. up to 500 lu.

2C - 2 circuit

dimensional data

NOTE: SPECIFICATIONS AND DIMENSIONAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE

cross sections

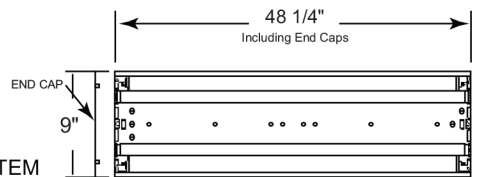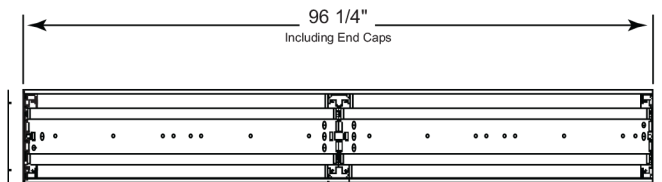

accessories

LAMP OPTIONS


13	T5/T8 841K
16	T5/T8 835K
11	T5/T8 830K

Note: Consult factory for optional hanging hardware including Tee Bar adapters

NOTE: In order to achieve rated lamp life, fixtures controlled by motion sensors should be ordered with programmed start ballasts when available and minimum time delay should be set to 15 minutes - Consult Factory

Consult factory for additional options not shown or listed

FEED SYSTEM

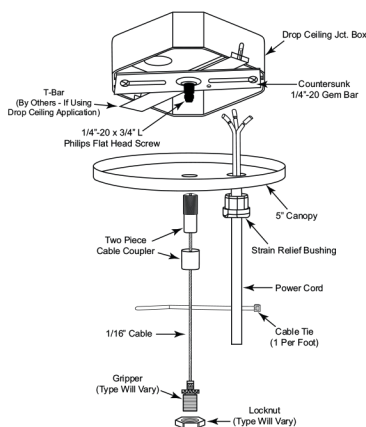

NON-FEED SYSTEM

