


SPECIFICATIONS

Features:	Electrical:(Option)	Application
- Constructed of die-formed heavy gauge cold rolled steel - Opal white acrylic overlay diffuser for visual comfort - Microperforated baffle with white opal acrylic inlay combines soft downlight with even ceiling illumination - Indirect reflectors are precision formed and contoured to provide soft,low-glare, indirect illumination while maintaining high-efficiency and a wide,uniform light - Painted with a lighting grade baked matt enamel, having a high reflectance factor for premium - Hinged baffle for quick, easy lamp access - Optional joiner assembly for continuous runs and tandem configurations - Suitable for T5 T8 lamp configurations - Available in two,three and four lamps model - Available in 24 inch to 60 inch - Suspended,continuous use	- G13 G5 lampholder from BJB,AAG stucchi or others - Terminal block,Quick disconnecter from IDEAL or WAGO 220-240V electronic ballast from TRIDONIC,PHILIPS,VS,OSRAM - ADVANCE,FULHAM,GE,SYLVANIA,UNIVERSAL ballast etc - Emergency kits or dimmable ballast,occupany sensor - Linear fluorescent lamp from GE,Philips,Osram etc - CCC,CE,CB,CSA,UL cUL listed	- Office - Libraries - Classrooms - Conference room - Retail applications

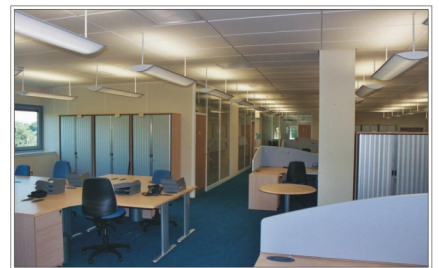

DIMENSIONS

Model	Lamp type	Lamps	Length	Width	Height
BL2 -Y32x2	F32T8	2x32W	48	11 6/8	3 4/8
BL2 -Y32x3	F32T8	3x32W	48	11 6/8	3 4/8
BL2 -Y32x4	F32T8	4x32W	48	11 6/8	3 4/8
BL2 -Y54x2	F28T5,F54T5HO	2x28W/54W	48	11 6/8	3 4/8
BL2 -Y54x3	F28T5,F54T5HO	3x28W/54W	48	11 6/8	3 4/8
BL2 -Y54x4	F28T5,F54T5HO	4x28W/54W	48	11 6/8	3 4/8

NOTE: (1)All dimensions are inches,1inch=25.4mm (2)T8 fluorescent tube US 17W=NON-US 18W,US 32W=NON-US 36W