

## DRL w/ LED Boards

# DRL SERIES


ARCHITECTURAL  
STYLING  
**DURADO**  
**LED**  
DIRECT/INDIRECT  
SUSPENDED

Job Name

Catalog Number

Notes

Type

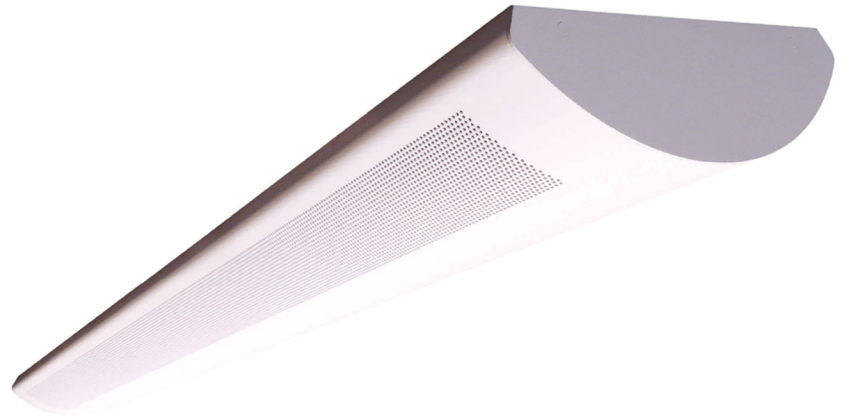

### *application*

- Attractive and versatile LED direct/indirect luminaire that provides maximum uplite with diffused downlight for a balanced appearance
- Suspended mount as individual units or continuous rows

### *finish*

- Prior to painting, all metal parts are treated with a multi-state phosphate bonding process to ensure adhesion and inhibit rusting
- All exterior parts are finished with white powder coat for durability and a clean finished appearance

### *construction*

- The DRL series is a premium grade LED luminaire specifically designed for long-term, dependable service
- Features a durable cold rolled steel body, semi-perforated diffuser, quality paint finish and superior electrical components
- Electrical compartment is constructed from code gauge steel for premium strength and rigidity
- Utilizing interlocking ends, continuous runs of any length may be constructed
- 50" adjustable aircraft cable kit included
- Individual units are available up to 8' in length
- All fixtures are U.L. listed and IBEW union made

### *electrical*

- All electrical components are U.L. listed or recognized
- Available in 3 lumen packages: Low, Medium & High

### *baffle*

- Lateral light distribution through side perforations for soft downlight

### *end caps*

- Flat style end caps

## DRL w/ LED Boards

### ordering guide

| DRL    |          |                                   |  |  |
|--------|----------|-----------------------------------|--|--|
| SERIES | LENGTH   | POWER                             | COLOR TEMP   | GENERAL OPTIONS                            |
| DRL    | 48<br>96 | L - Low<br>M - Medium<br>H - High | 30 - 3000K<br>35 - 3500K<br>40 - 4000K<br>50 - 5000K | EM - Emergency pack, >90 min., >500 lumens |


**D R L**  
SERIES  
ARCHITECTURAL  
PENDANT MOUNT  
INDIRECT/DIRECT LED

Consult factory for additional options not shown or listed

### dimensional data



NOTE: SPECIFICATIONS AND DIMENSIONAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE

#### cross sections

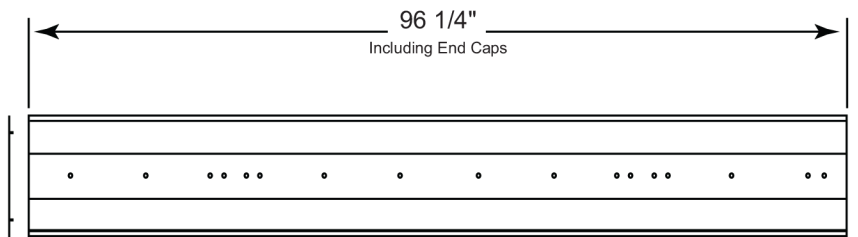


DRL 4' 4000K


| Low     | Medium  | High    |
|---------|---------|---------|
| 4270 Lu | 5760 Lu | 9020 Lu |
| 42W     | 61W     | 93W     |

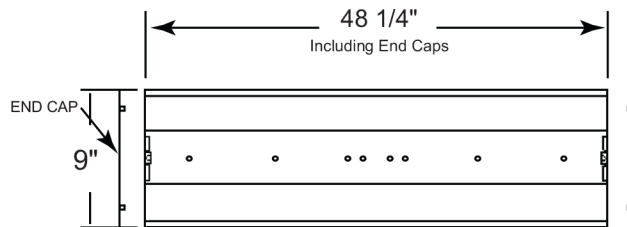


Optional End Scoop



#### FEED SYSTEM

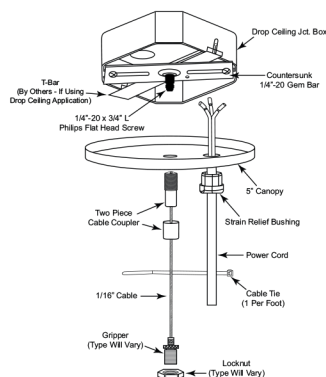

#### NON-FEED SYSTEM

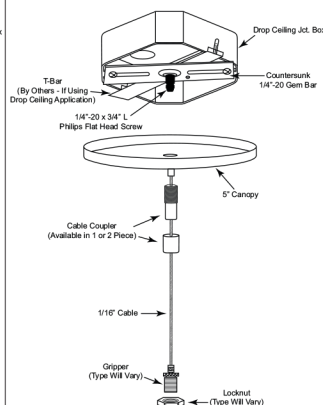

Aircraft cable mounting point  
3/8" in from end

