

Vaporproof

General Description:

Vapor Tight Linear Fluorescent Fixture is a quality gasketed enclosure designed to protect lighting in harsh environment. The low profile makes it ideal for tight areas and low ceilings. This unit seals out dust and moisture from electrical components in a wide range of applications, making it the ultimate choice for food processing facilities, kitchens, parking garages, car washes, government facilities, school, public and industrial areas.

Mounting:

Vapor Tight Fluorescent Fixture is ideally suited for surface, or suspension mounting with optional wire hook and chain set or cable mounting.

Size: W x L x H

4 ft. - 6.8" x 51.7" x 2.13"
8 ft. - 6.8" x 100.0" x 2.13"

Lamps:

2 or 3 for 4 ft. fixture.
4 or 6 for 8 ft. fixture.

Construction:

Constructed of a fiberglass upper body and an acrylic diffuser, locked by retaining latches, ensuring a secure tight seal.



Labels:

Fixtures conforms to UL , CUL standards, NSF, IP67 and are carefully tested prior to packing. Meets NYC requirements.

Retainer Clips:

Stainless steel hooks for gear-tray suspension during maintenance.

Safety Straps:

Connects gear-tray to the housing, helping to prevent gear-tray from falling during maintenance.

Ordering Guide:

Example: VT4284WMVTIWBEM

1	Model No.	2	Size	3	Lamps	4	Lamp Configuration	5	Optics
VT	Vaporproof	4	4 ft.	32	32 w T8	2	2 lamp	W	White (Standard)
		8	8 ft.	28	28 w T5	3	3 lamp	M	Mirrored (Optional)
				54	54 w T5HO	4	4 lamp		
						6	6 lamp		

6	Voltage	7	Ballast	8	Finish	9	Mounting	10	Options
120	120v	I	Instant Start	W	White	B	Mounting Bracket	OCC	Occupancy Sensor
277	277v	P	Program Start					EM	Emergency Ballast
347	347v								
MVT	120-277v								





1	2	3	4	5	6	7	8	9	10
VT							W	B	

Catalog No.

Project:

Notes:

Vaporproof

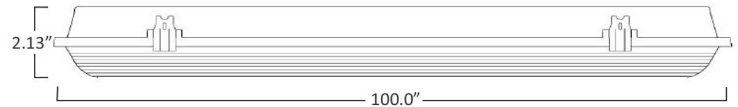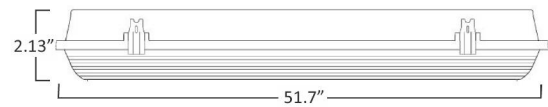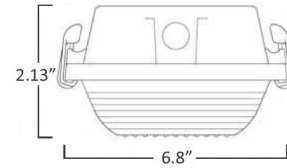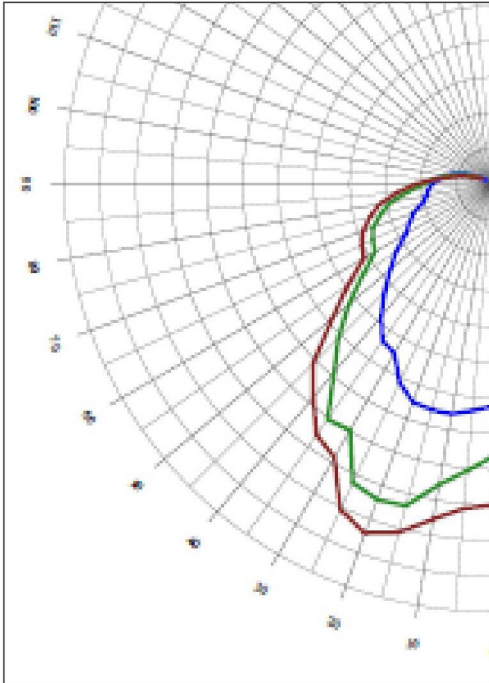

IES Spacing Criteria:	T8	T5HO	T5HO-C
End	1.2	1.2	1.2
Diagonal	1.3	1.5	1.4
Cross	1.3	1.5	1.4
% Lamp 0-180 (Rated Lumens)	69.8%	56.6%	64.5%

IES Spacing Criteria:	T8	T5HO	T5HO-C
End	1.2	1.2	1.2
Diagonal	1.2	1.4	1.4
Cross	1.2	1.4	1.3
% Lamp 0-180 (Rated Lumens)	77.1%	63.5%	70.2%

Blue: T8 (30mm lamp holder)
Green: T5HO (19mm lamp holder)
Red: T5HO-C (19mm lamp holder)